



PCT/GB 2003 / 0 0 4 6 2 4



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP10 8QQ

WIPO PCT

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gensy


Dated

14 November 2003

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)

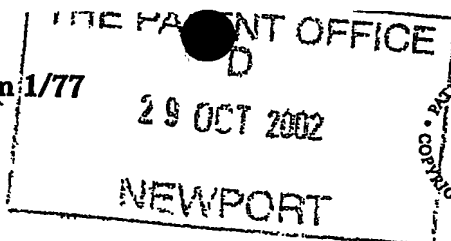

29 OCT 02 6359249-2 000357
P01/7700 0.00-0225087.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

W071353PGB

2. Patent application number

(The Patent Office will fill in this part)

0225087.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Cadbury Schweppes plc
25 Berkeley Square
London, W1X 6HT
England

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

England

360594003

4. Title of the invention

METHOD OF PREPARING MOULDED CONFECTIONERY ARTICLES

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk
Alpha Tower
Suffolk Street Queensway
Birmingham, B1 1TT
England

Patents ADP number (if you know it)

18002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description **6**

Claim (s)

Abstract

Drawing (s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

David Ward & Clerk

Date

28/10/02

12. Name and daytime telephone number of person to contact in the United Kingdom

David WARD

0121 643 5881

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

METHOD OF PREPARING MOULDED CONFECTIONERY ARTICLES

This invention relates to a method of preparing moulded confectionery articles and is more concerned with a method of preparing moulded confectionery articles comprising both a candy composition and a chocolate composition.

It is known to prepare moulded confectionery articles comprising a candy outer layer with an inner core formed of chocolate. However, problems arise when moulding such confectionery articles because the candy composition needs to be deposited in the moulds at a relatively high temperature to enable the candy to flow properly. On the other hand, chocolate suffers from the disadvantage that, when it is heated above a critical temperature, it exhibits a sharp increase in viscosity making it virtually impossible to mould successfully. This critical temperature is generally in the range of about 50°C to 120°C but depends upon the nature of the chocolate formulation. The critical temperature is higher for dark chocolate (i.e. chocolate containing no milk solids) than for milk and white chocolate, both of which contain milk solids. This sharp increase in viscosity also occurs with chocolate compound coatings.

Furthermore, chocolate also tends to degrade when exposed for extended periods of time to temperatures rather lower than the critical temperatures. Thus, it is common to set practical upper temperature limits when handling chocolate. The limits are typically set at 85°C for dark chocolate, and 75°C for milk and white chocolates. Above these temperatures, the viscosity of the chocolate increases, and extended holding times causes flavour degradation, and eventually the product solidifies into an unworkable mass.

It is an object of the present invention to provide an improved method of preparing moulded confectionery articles which enables the above-mentioned problems to be mitigated.

According to the present invention, there is provided a method of preparing moulded confectionery articles, comprising the steps of:

- (1) preparing a liquid candy composition which solidifies upon cooling, said liquid candy composition being at a first temperature;
- (2) preparing a liquid chocolate composition which solidifies upon cooling, said liquid chocolate composition being at a second temperature which is lower than said first temperature;
- (3) co-depositing the liquid candy composition and the liquid chocolate composition in moulds; and
- (4) cooling the moulded compositions in the moulds so as to solidify the moulded compositions to form moulded confectionery articles;

wherein the liquid chocolate composition is subjected to a high shear of at least 100 s^{-1} , preferably up to 5000 s^{-1} , before being co-deposited in the moulds.

By subjecting the liquid chocolate composition to a high shear before it is co-deposited into the moulds, it is found that the liquid chocolate composition can remain mouldable at temperatures above the temperature at which it normally exhibits a sharp increase in viscosity. Thus, this procedure enables the candy composition to be deposited into the moulds at a temperature which is higher than has heretofore been considered possible.

Co-depositing the candy composition and the chocolate composition in the mould ensures that the chocolate composition is exposed to the higher first

temperature for only a relatively short period of time, thus reducing the risk of flavour degradation and product solidification.

For example, it is found that, even when the chocolate composition is a milk chocolate composition, it can be successfully co-deposited with a liquid candy composition at temperatures as high as 150°C using a one-shot co-depositor, if the chocolate composition is subjected to a high shear of at least 100 s⁻¹, and preferably at about 500 s⁻¹, and preferably up to 5000 s⁻¹.

The candy composition may be any sugar-based candy composition such as a hard candy composition or a caramel composition. These are generally compositions which are produced by boiling a sugar syrup to a temperature of about 150°C and introducing flavourings into the cooked sugar. These high boiling compositions must be deposited at at least about 135°C to avoid so-called "tailing" during depositing. In contrast, the chocolate composition is maintained at a much lower temperature (typically about 40°C) up until the time when it is co-deposited with the candy composition. At which time, it becomes heated to about 135°C as a result of heat transfer from the candy composition.

In the case where the chocolate composition to be deposited has a relatively low critical temperature, in addition to subjecting it to a high shear, it is also within the scope of the invention to include a minor amount of dark chocolate (e.g. up to about 10%) so as to increase its critical temperature. However, this procedure does suffer from the disadvantage that the taste of the chocolate is changed and may also increase the cost of production.

It is further possible to improve the viscosity characteristics of the chocolate being moulded by increasing the fat content by, for example, addition of cocoa butter in an amount of at least 1% by weight and preferably at least 2% by weight.

Preferably, the chocolate is subjected to a high shear in the range of 100 to 1000 s^{-1} , more preferably 200 to 500 s^{-1} before being deposited into the moulds.

The chocolate composition may be subjected to high shear either in the depositor itself immediately prior to being introduced into the moulds, or it may be subjected to high shear prior to being passed to the depositor.

However, it is important to effect such shearing at a stage when the chocolate will not lose its advantageous viscosity characteristics before being deposited into the moulds.

In one series of embodiments, the chocolate composition is subjected to high shear prior to being passed into the depositor and in the depositor itself, the first shearing process being referred to hereinafter as "pre-shear". Preferably, said pre-shear is from about 100 s^{-1} to 5000 s^{-1} . More preferably, the chocolate composition is subjected to a pre-shear which is greater than the subsequent shear in the depositor.

An example of the present invention will now be described in more detail.

Recipe

	Ingredient	% by weight
1)	Premix of Liquid sugar Glucose Syrup	54.3 35.5
2)	Flavour	0.2
3)	Milk Chocolate coating (see Example below)	10.0

Process

1. The pre-mix was batch weighed into a heated tank.
2. The pre-mix was transferred via a small buffer tank to a pre-cooker and heated to 126°C.
3. The pre-mix was then transferred to a Microfilm vacuum cooker where it was cooked at 150°C in a vacuum of 3 inHg (10.2 kPa).
4. The flavour was mixed into the cooked candy mass which was then transferred to the depositor hopper (temperature 140°C).
5. Molten chocolate coating at 40 °C was pumped to the depositor hopper (temperature 50°C).
6. The cooked candy mass and the chocolate were co-deposited through a manifold plate at 135 °C into moulds, at a speed of 70 strokes per minute (Baker Perkins (APV) model 156 depositer 156/049).
7. The moulds were immediately transferred into a cooling tunnel set to 25°C and 35% RH (relative humidity) to harden and cool down the candy.
8. The candies were then de-moulded and fed automatically via conveyors to wrapping machines.

The average shear rate experienced by the chocolate in the narrowest section of the depositor (i.e. the depositor nozzle) was calculated to be 245s^{-1} (i.e. half the shear rate experienced at the wall of the depositor nozzle, assuming Newtonian flow behaviour).

Example Milk chocolate coating composition	% by weight
Milk chocolate crumb	69.8
Cocoa butter equivalent	21.9
Butter oil	0.3
Soya lecithin	0.3
Sugar	4.2
Cocoa liquor	3.4
Flavour	0.1

In a modification of the above Example, the molten chocolate composition is subjected to a pre-shear in an in-line shear mixer prior to being pumped into the depositor.